



RESEARCH ARTICLE - ENGINEERING

A Design of CP-MIMO System with Elements of a Diamond-Ring Slot for 5G Mobile-Phone

Alyaa S. Abdullah^{1*}, Seham A. Hashem², Mahmood F. Mosleh¹

¹ Computer Techniques Engineering, Middle Technical University, Baghdad, Iraq.

² Department of Technical Electronic, Technical Instructors Training Institute, Middle Technical University, Baghdad, Iraq.

* Corresponding author E-mail: bbc0036@mtu.edu.iq

Article Info.	Abstract
<p><i>Article history:</i></p> <p>Received 23 May 2021</p> <p>Accepted 12 June 2021</p> <p>Publishing 30 June 2021</p>	<p>This paper proposed a Circular Polarization (CP) smartphone antenna Multiple Input Multiple Output (MIMO) system with elements of a diamond ring slot for next-generation (5G). The model's composition contains four elements. Each element has a dual-fed diamond ring slot arranged at the four smartphone corners Printed Circuit Board (PCB). A cheap FR-4 substrate with using a size of 75 x 150 mm² as the design dielectric mater. 50-Ohm microstrip-lines T-shaped feeds the antenna ports. The orthogonal positioning of microstrip feed lines is used to achieve polarization and diversity characteristics. The paradigm results show that each port operated with an operating frequency of 3.74 GHz, with the overall system running at 3.84 GHz. Also, the results show that the MIMO system is suitable for operation in a sub-6 band that qualified for 5G smartphone applications.</p>
2019 Middle Technical University. All rights reserved	
<p>Keywords: MIMO Antennas; CP; ECC; 5G; diamond-ring slot</p>	

1. Introduction

For 5G communications, the MIMO systems are a crucial enabler. On the other hand, the MIMO technology represented a form of spatial diversity [1]. Diversity/MIMO techniques can raise wireless channel capacity in rich scattering environments by expanding the number of transceiver antennas of the wireless link [2],[3]. However, due to its limited space of small mobile devices, MIMO antenna elements' correlation coefficients are usually very high [4]. The overall efficiencies of MIMO elements will be significantly degraded severely due to mutual couplings [5]. To outclass the above issue, a polarization technique is used in a MIMO systems array with an alternate small PCB to efficiently deal with many antennas array in a little space [6]. The slot antenna type is one of the multi-antenna models which deal with 5G applications. A slot antenna is a vital antenna type that has been extensively investigated for several decades for various wireless systems due to its appealing features, included lightweight, low cost, and a facility of integral with Radio Frequency (RF) circuit [7],[8],[9]. Using the orthogonal placement of micro-strip feed concerning each other can show polarization and radiation pattern diversity [10].

Furthermore, CP antennas have recently gained prominence due to their enhanced signal propagation properties as compared to Linearly Polarized (LP) antennas [11]. On the other hand, CP can combine with the orthogonal dual-feed to obtain high isolation [12], so the present study attempts to use such a strategy. Many pieces of research deal with a slot microstrip-line to create the dual-polarized antenna with different shapes to slot such as in [13], [14], proposed V and L- shaped slot antenna for dual-polarization respectively to obtain Ultra-Wide Band (UWB). In this paper, a dual-polarized MIMO system with CP is presented for 5G applications. The MIMO antenna consists of the four-diamond ring slot radiator elements with T-shaped microstrip feed lines arranged at the four PCB corners. The length and width of micro-strip feed lines are tuned to achieve high isolation. This design has unique features such as an essential band for 5G application, high return loss, and a very low correlation coefficient.

Nomenclature			
CP	circular polarization	SMA	sub-miniature
MIMO	multiple input multiple output	CST	computer simulation technology
5G	fifth-generation	VSWR	voltage standing wave ratio
PCB	printed circuit board	AR	axial ratio
FR-4	flame retardant	3D	three-dimensional
RF	radio frequency	dB	decibel
LP	linearly polarized	Symbols	
DG	Diversity Gain	ρ_{ej}	envelope correlation coefficient
UWB	ultra-wideband	S_{ij}	S-Parameters
ECC	envelope correlation coefficient		

2. Single Antenna Design

The schematic of the proposed dual-polarized CP antenna configuration is with dimensions of $24 \times 24 \text{ mm}^2$, shown in Fig. 1. The antenna was designed on an FR-4 substrate with 1.6 mm thickness, 4.3 relative permittivity, and 0.02 loss tangent. Its composition includes a diamond-ring slot radiator with inner and outer radiuses of r_1 and r_2 , respectively. The proposed feeder types are a pair of microstrip-lines T-shaped are placed on orthogonal positions. For both antenna feeding ports, 50Ω Sub-Miniature Version A (SMA) connectors are used. The submitted design approach aims to build a dual-polarized with a high return loss antenna and a suitable size. Also, four elements will be integrated into a PCB smartphone. All elements were accomplished by using the micro-strip feed lines T-shaped with the diamond-ring slot antenna. We proposed a T-shape in this paper to achieve an elevation radiation pattern and good return loss [15]. Designed antenna configuration parameter values are listed in Table 1.

3. MIMO Antenna Model

The MIMO antenna is integrated on a cheap FR-4 substrate with a total size of $75 \times 150 \times 1.6 \text{ mm}^3$. Four dual-polarized diamond ring slot elements used at the different corners of the PCB smartphone. In addition to showing sufficient bandwidth, slot radiators on the proposed 5G prototype will provide nearly symmetrical radiation patterns to cover the PCB's top and bottom regions. Figure 2 shows the geometry of the MIMO antenna.

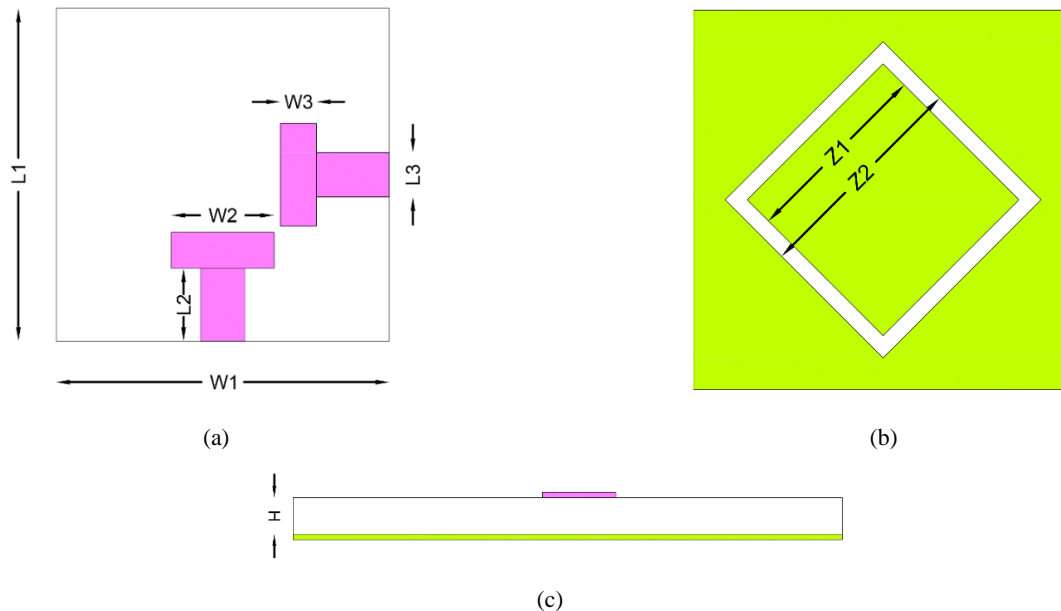


Fig. 1 The antenna geometry, (a) top layer, (b) bottom layer, and (c) side view

Table 1 Parameter values of the antenna design	
Parameter	Value (mm)
L1	24
W1	24
L2	5.25
W2	7.4
L3	3.2
W3	2.6
Z1	12.16
Z2	14.14
H	1.6

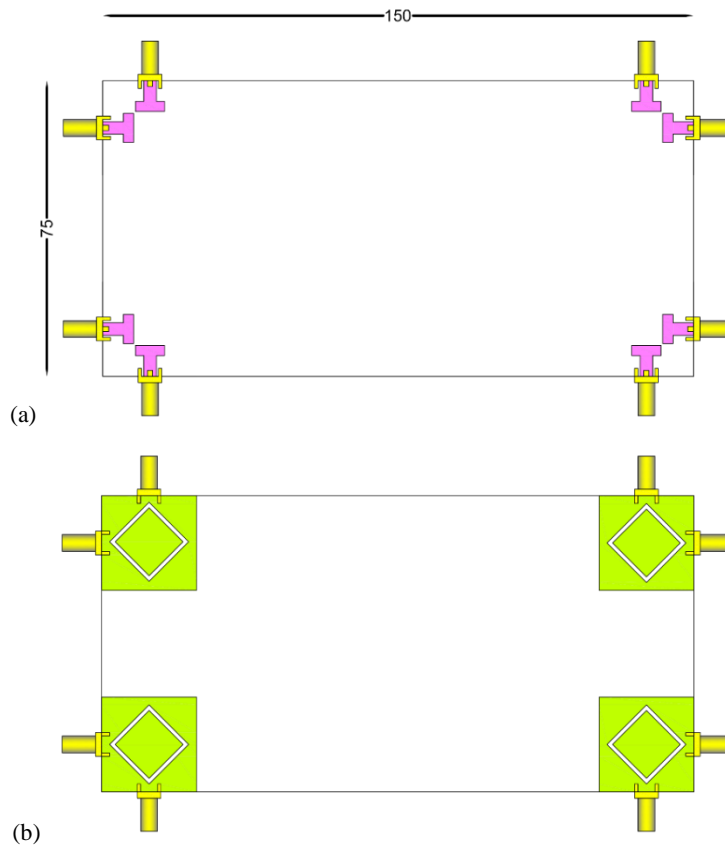


Fig. 2 Designed smartphone antenna (a) top layer and (b) the bottom layer

4. The Results of Simulation

The proposed model of a single and MIMO are simulated using CST.STUDIO 2020 to evaluate their performances. Such a model is achieving after many trying with various dimensions that lead to the final proposed scheme. The microstrip-line feeder's width and length and the PCB dimension were all modified to produce the best performance.

4.1. Single Antenna Simulation

Fig. 3 illustrates the return loss and isolation for the proposed diamond-ring slot radiator antenna. The operating frequency range is 3.3 to 4.8 GHz at (-10 dB), with a resonance frequency of 3.74 GHz and return losses of (-63 dB). Furthermore, it was achieving high isolation through a band of (3.1-4.7 GHz). The Voltage Standing Wave Ratio (VSWR) characteristic of the proposal is represented in Fig. 4. The resultant value of VSWR at operating frequency did not exceed 2 dB, which matches its condition according to [16].

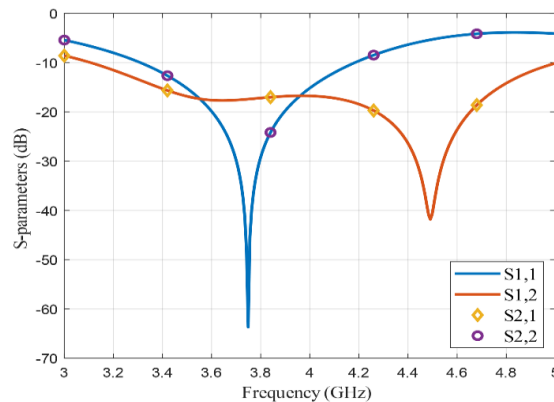


Fig. 3 S-Parameter for single antenna element

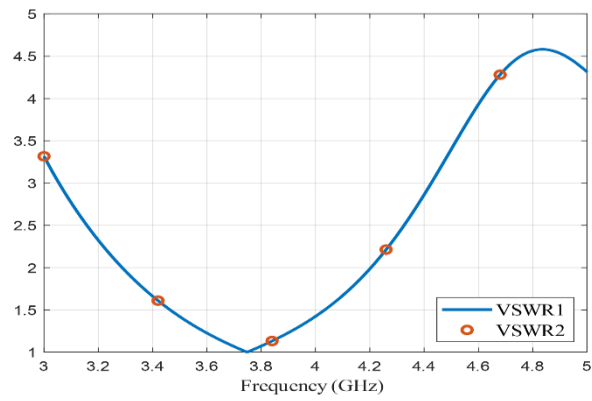


Fig. 4 The VSWR for a single antenna element

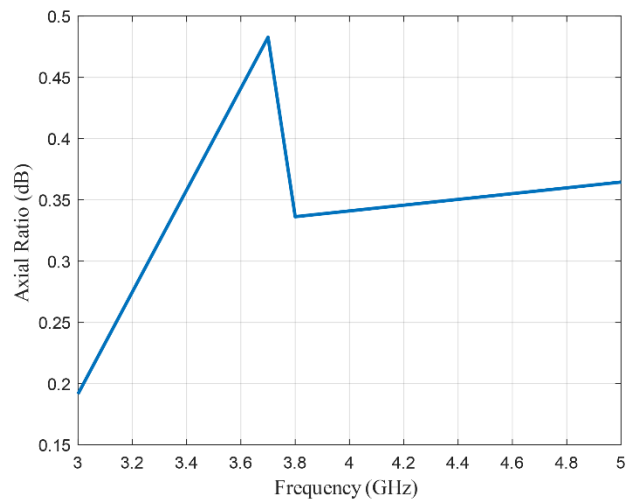


Fig. 5 AR for single antenna element

The Axial Ratio (AR) is an essential parameter for CP antennas that should not exceed -3dB, as the decision of [11], as shown in Fig. 5. In addition, Fig. 6 illustrates the 3D radiation pattern at the operating frequency, and it is noted that port-1 has an omnidirectional radiation pattern along the xz-plane. In contrast, the port-2 radiation pattern has an omnidirectional radiation pattern along the yz-plane.

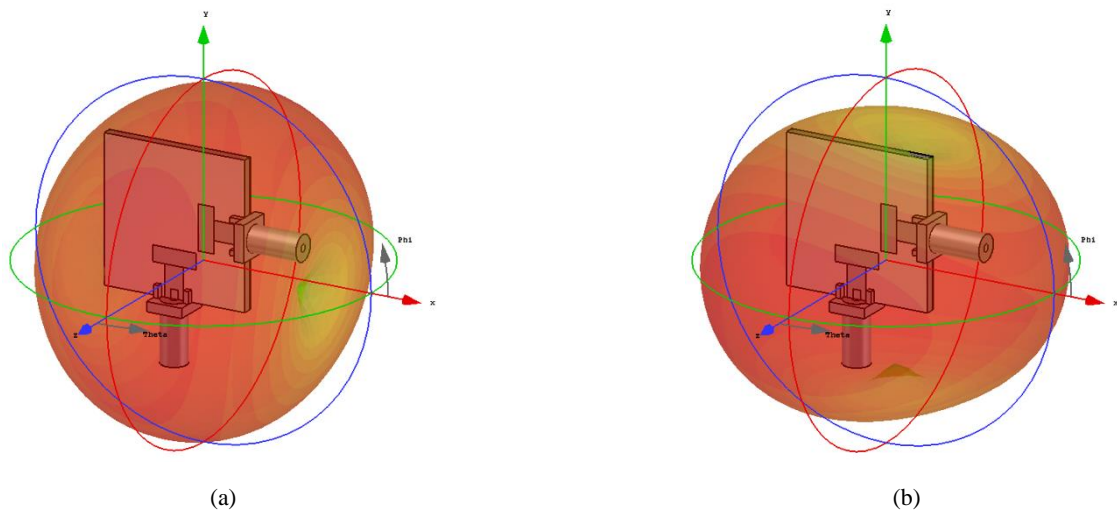


Fig. 6 The 3D radiation patterns of the dual-polarized (a) port-1 and (b) port-2

4.2. MIMO Antenna Simulation

The MIMO model simulation discusses three performance criteria: S-Parameter, diversity performance, and radiation patterns. In terms of the S-Parameters (S_{ij} , with $i = j$): S_{11} – S_{88} and (S_{ij} , with $i \neq j$): S_{21} – S_{81} are demonstrated in Fig. 7, with the desired frequency range. The proposed MIMO model achieves good S-parameters with appropriate impedance bandwidth (900 MHz) and high isolation features.

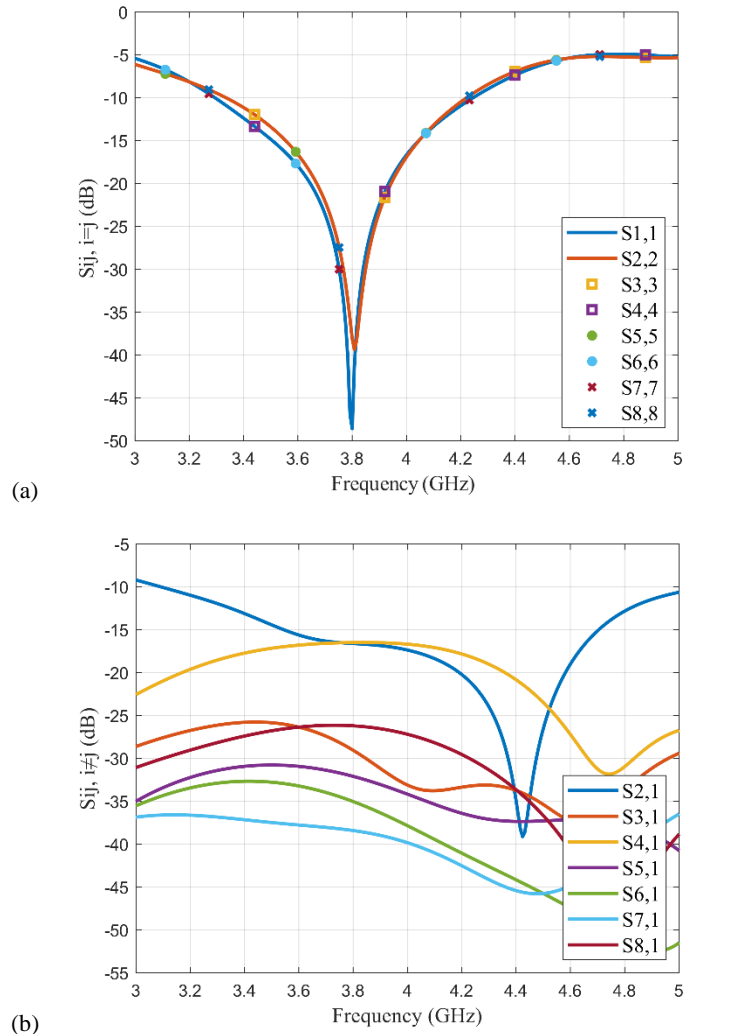


Fig. 7 The S-Parameters for MIMO system (a) S_{ij} , with $i = j$ and (b) S_{ij} , with $i \neq j$

The VSWR performance of the suggested MIMO system of all ports shown in Fig. 8 indicates that the value does not exceed 2.

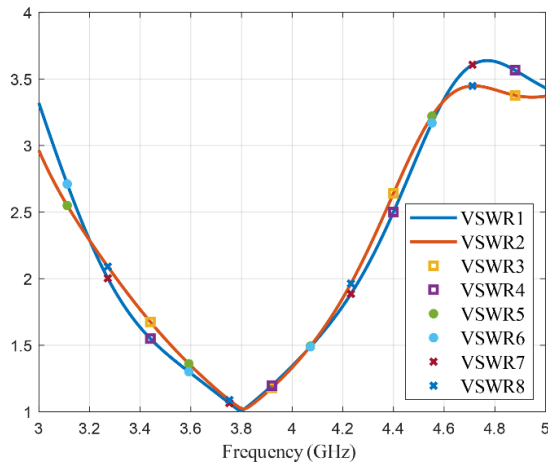


Fig. 8 VSWR of MIMO antenna system

The third performance is the AR which illustrates in Fig.9. AR simulated for the proposed MIMO at the operating frequencies <3 dB the broadside direction ($\theta = 0^\circ$ and $\varphi = 0^\circ$).

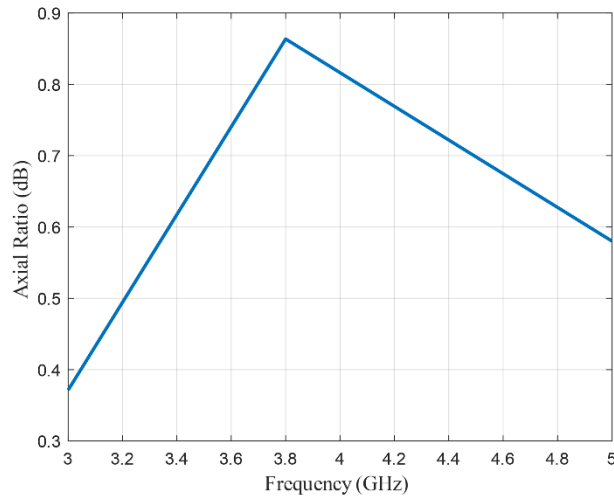


Fig. 9 AR of MIMO antenna

In terms of diversity performance, the first significant parameter used to calculate the diversity of the antenna's performance is the Envelope Correlation Coefficient (ECC). They are used to calculate the similarity degree between two beams pattern. The lower correlation can mean that the two beam patterns have less overlap [9]. By using the S-parameters of the following equation (1):

$$\rho_{eij} = \frac{|s_{ii} * s_{ij} + s_{ji} * s_{jj}|^2}{(1 - |s_{ii}|^2 - s_{ij}^2)(1 - |s_{jj}|^2 - s_{ji}^2)} \quad (1)$$

Figure 10 shows the results of the correlation coefficient of the proposed antenna less than 0.01 in its operating frequency. It is confirming that such a coefficient is very low compared to a standard value (< 0.5) [17].

Diversity Gain (DG) is the second significant parameter that indicates the antenna efficiency in terms of the diversity gain set. The results are illustrated in Fig. 11, which can be calculated using equation (2) [18]:

$$DG = 10 \sqrt{1 - |\rho_{eij}|^2} \quad (2)$$

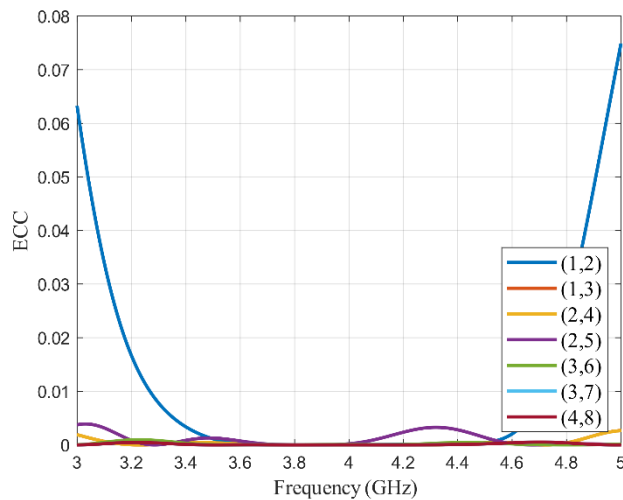


Fig. 10 ECC of MIMO antenna system

Finally, the simulation of 3D radiation pattern performances shows in Fig. 12 all ports deployed in the suggested 5G smartphone PCB. It shows that the radiation patterns of radiators can cover each side of the PCB smartphone. Simultaneously, different polarizations can be achieved for each PCB region due to the antenna component dual-polarized characteristics, making the proposed MIMO antenna system proper for future mobile applications.

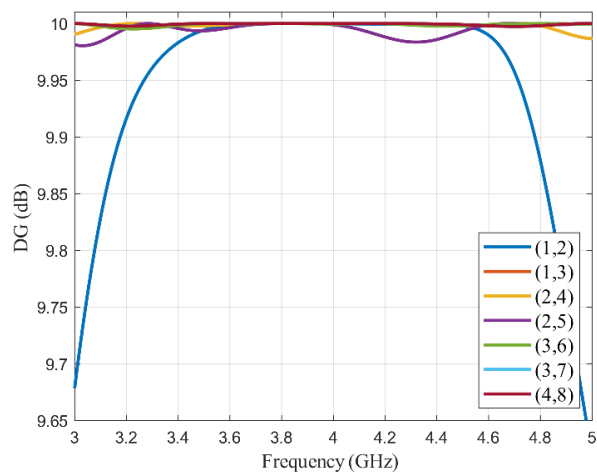
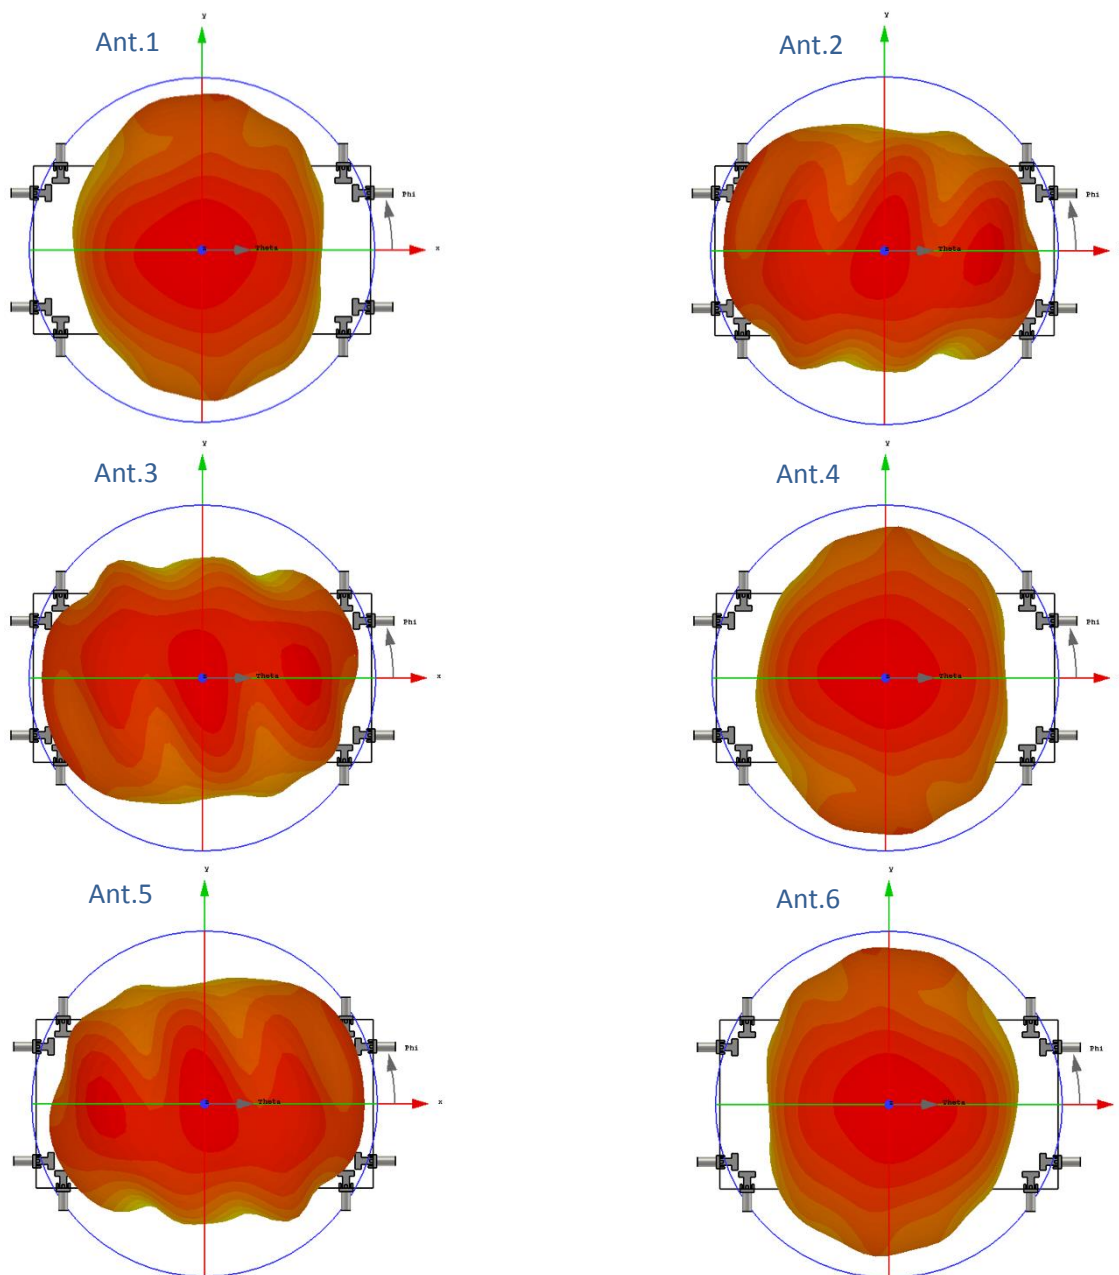


Fig. 11 DG of MIMO antenna system



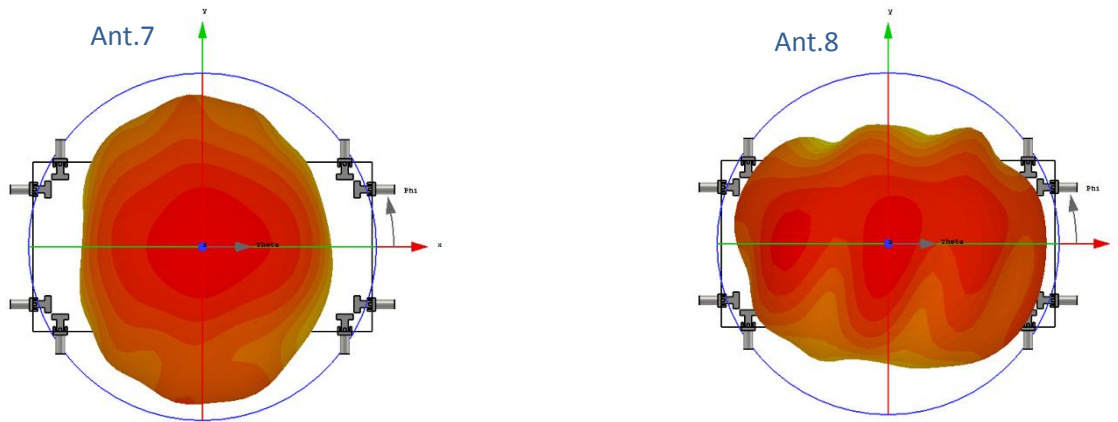


Fig. 12 3D radiation patterns of 5G smartphone antenna

5. Conclusion

In this paper, a CP dual-polarized antenna design is proposed for a 5G MIMO system. The antenna schematic consists of four elements; each one contains a dual-port with T-shaped microstrip feed lines arranged at the four PCB corners with a dimension of $75 \times 150 \text{ mm}^2$. The antenna's orthogonal orientation of microstrip feed lines provides polarization diversity with a very low correlation coefficient without using decoupling structures. High impedance matching (around -63 dB reflection coefficients) is achieved by tuning the length and width of microstrip feed lines. The results showed that the proposed antenna of the smartphone has good properties and meets future mobile applications' criteria.

Reference

- [1] Al-Ogaili, Fatimah, and Raed M. Shubair.: "Millimeter-wave mobile communications for 5G: Challenges and opportunities." 2016 IEEE International Symposium on Antennas and Propagation (APSURSI). IEEE, (2016).
- [2] Yang, Howard H., and Tony QS Quek.: "Massive MIMO for Interference Suppression: Cell-Edge Aware Zero Forcing." Massive MIMO Meets Small Cell. Springer, Cham, 9-34,(2017).
- [3] Irene, G., and A. Rajesh.: "A dual-polarized UWB-MIMO antenna with IEEE 802.11 ac band-notched characteristics using split-ring resonator." Journal of Computational Electronics 1090-1098, 17.3 (2018).
- [4] Parchin, Naser Ojaroudi, et al.: "Eight-element dual-polarized MIMO slot antenna system for 5G smartphone applications." IEEE access 7, 15612-15622., (2019).
- [5] Chen, Xiaoming, Shuai Zhang, and Qinlong Li.: "A review of mutual coupling in MIMO systems." Ieee Access 6, 24706-24719, (2018).
- [6] Pouyanfar, Negin, et al. : "An UWB metamaterial-based circularly polarized MIMO antenna with high isolation." 2018 9th International Symposium on Telecommunications (IST). IEEE, (2018).
- [7] Xiong, Ling, and Peng Gao.: "Compact dual-polarized slot UWB antenna with CPW-fed structure." Proceedings of the 2012 IEEE International Symposium on Antennas and Propagation. IEEE, (2012).
- [8] Srivastava, Gunjan, and Akhilesh Mohan. : "Compact MIMO slot antenna for UWB applications." IEEE Antennas and Wireless Propagation Letters 15 1057-1060,(2015).
- [9] Ojaroudi Parchin, Naser, et al.: "Mobile-phone antenna array with diamond-ring slot elements for 5G massive MIMO systems." Electronics 8.5,521, (2019).
- [10] Mathur, Rohit, and Santanu Dwari. : "Compact 4-Port MIMO/diversity antenna with low correlation for UWB application." Frequenz 72.9-10, 429-435., (2018).
- [11] Saxena, Shobhit, et al.: "Planar Four-Port Dual Circularly-Polarized MIMO Antenna for Sub-6 GHz Band." IEEE Access 8, 90779-90791, (2020).
- [12] Hussain, Niamat, et al.: "Metasurface-based single-layer wideband circularly polarized MIMO antenna for 5G millimeter-wave systems." IEEE Access 8, 130293-130304, (2020).
- [13] Krishna, RVS Ram, and Raj Kumar. "Design and investigations of a microstrip fed open V-shape slot antenna for wideband dual slant polarization." Engineering Science and Technology, an International Journal 18.4, 513-523 (2015).
- [14] Krishna, Raghupatruni Venkatsiva Ram, Raj Kumar, and Nagendra Kushwaha. "An UWB dual polarized microstrip fed L-shape slot antenna." International Journal of Microwave and Wireless Technologies 8.2, 363, (2016).
- [15] Al-Ani, Nada M. Khalil, et al.: "Design of dual ports coplanar waveguide MIMO system for UWB applications." IOP Conference Series: Materials Science and Engineering. Vol. 745. No. 1. IOP Publishing, (2020).
- [16] Shandal, Shereen A.: "Size Miniaturized Fractal Nested Circular Rings-Shaped Microstrip Antenna for Various Wireless Applications." Engineering and Technology Journal 36.11 Part A (2018).
- [17] Saxena, Shobhit, et al.: "A compact dual-polarized MIMO antenna with distinct diversity performance for UWB applications." IEEE Antennas and Wireless Propagation Letters 16 3096-3099, (2017).
- [18] Ojaroudi Parchin, Naser, et al.: "Ultra-wideband diversity MIMO antenna system for future mobile handsets." Sensors 20.8, 2371, (2020).